




## Product Overview

- Thread type : Metric (M), PG, NPT
- Material : Brass with Nickel Plated (A, C, F)
- Claw : PA (E)
- Sealing and Sealing Ring : NBR (B, D)
- Approvals : CE, ROHS, REACH
- Protection Degree : IP68
- Temperature Resistance : -40°C to 100°C, Short time to 120°C
- Function : Extremely easy installation, simply insert cable through the assembled gland and tighten gland locknut until cable is secured. Resistant to salt water, alcohol, weak acid, grease oil and common solvent.

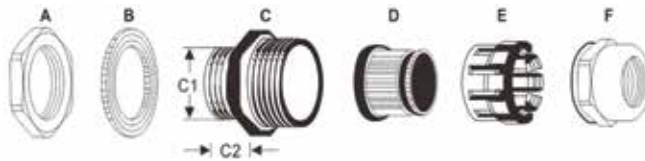

### PG TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-PG7	3-7	12.5	6.0	14.0	100
TPE-PG9	4-8	15.2	7.0	17.0	100
TPE-PG11	6-10	18.6	7.0	20.0	100
TPE-PG13.5	8-12	20.4	8.0	22.0	100
TPE-PG16	10-14	22.5	8.0	24.0	100
TPE-PG19	10-14	23.8	8.0	24.0/27.0	100
TPE-PG21	13-18	28.3	9.0	30.0	50
TPE-PG25	15-22	30.0	9.0	34.0	50
TPE-PG29	18-25	37.0	9.0	40.0	20
TPE-PG36	25-32	47.0	10.0	50.0	10
TPE-PG42	32-38	54.0	10.0	57.0	10
TPE-PG48	37-44	59.3	11.0	64.0	5
TPE-PG63	42-52	70.8	15.0	78.0	5

### M TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-M8x1.0(1.25)	3-7	8.0	5.0	12.0	100
TPE-M10x1.0	3-7	10.0	6.5	14.0	100
TPE-M12x1.5	3-7	12.0	8.0	14.0	100
TPE-M16x1.5	4-8	16.0	8.0	17.0	100
TPE-M20x1.5	8-12	20.0	8.0	22.0	100
TPE-M25x1.5	10-14	25.0	9.0	30.0	50
TPE-M32x1.5	15-22	32.0	10.0	40.0	20
TPE-M40x1.5	22-28	40.0	11.0	50.0	20
TPE-M50x1.5	32-38	50.0	13.0	57.0	10
TPE-M63x1.5	37-44	63.0	14.0	64.0	5
TPE-M72x2.0	42-52	72.0	16.0	78.0	5
TPE-M75x2.0	42-52	75.0	16.0	80.0	5
TPE-M80x2.0	50-62	80.0	18.0	88.0	5
TPE-M88x2.0	60-70	88.0	18.0	94.0	5
TPE-M100x2.0	70-80	100.0	20.0	110.0	5

### NPT TYPE

Product Model	Cable Range	Thread (O.D.) (C1)	Thread Length (C2)	Spanner Size	Qty / Bag
TPE-NPT3/8"	4-8	17.0	8.0	18.0	100
TPE-NPT1/2"	8-12	21.2	8.0	22.0	100
TPE-NPT3/4"	13-18	26.5	9.0	30.0	50
TPE-NPT1"	15-22	33.2	11.0	40.0	20
TPE-NPT1-1/4"	22-28	41.9	13.0	50.0	10
TPE-NPT1-1/2"	25-32	48.0	14.0	57.0	10
TPE-NPT2"	37-44	60.0	14.0	65.0	5
TPE-NPT2-1/2"	42-52	72.6	15.0	77.0	5
TPE-NPT3"	65-70	87.8	15.0	94.0	5

\*\*บริษัทฯ ขอสงวนสิทธิ์การเปลี่ยนแปลงราคา โดยมิต้องแจ้งให้ทราบล่วงหน้า\*\*

ส่วนติดต่อค้าขาย Tel 02-027-7841, 095-543-5665 / Fax 02-026-6529

Email : sales.tpetrading@gmail.com / ID Line : @tpetrading