


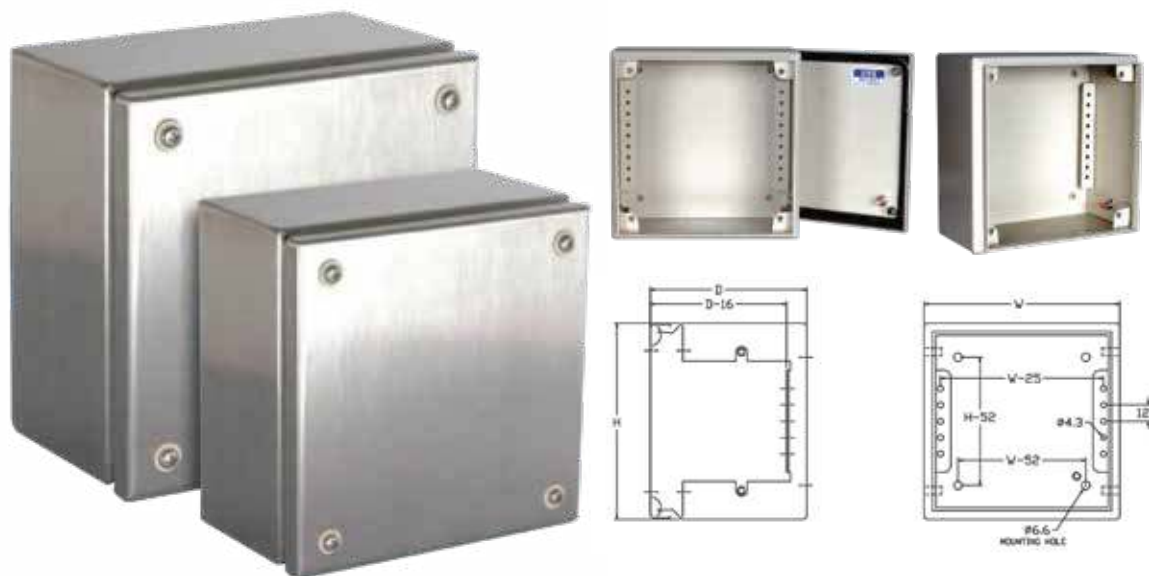

Product Overview

- Material & Finish
 - 1.5mm. SS304, hairline surface finish.
 - 1.5mm. mild sheet, powder coated.
- A continuous polyurethane gasket seal on door to ensure IP rating.
- Double folded door frame to prevent water from entering while door is opened.
- IP66 (IEC 529)
- Spacious body for easy installation and fixing accessories.
- Pre-punched holes on internal bracket for fixing din rail and mounting plate.
- Earthing facility on door and body.
- 4 fixing holes for direct mounting to wall.
- Optional items - din rail, mounting plate and wall mounting bracket.

Material		Dimension
SS304	Painted Steel	H x W x D (in mm.)
CTX151512	CT151512	150 x 150 x 120
CTX152012	CT152012	150 x 200 x 120
CTX202012	CT202012	200 x 200 x 120
CTX203012	CT203012	200 x 300 x 120
CTX204012	CT204012	200 x 400 x 120