


Product Overview

- Specification of thread : Metric, G, NPT
- Material : PA6
- Temperature Range : -40°C to 100°C
- Protection Degree : IP66, Using suitable seals (FR/ FRH)



CE ROHS PAHS

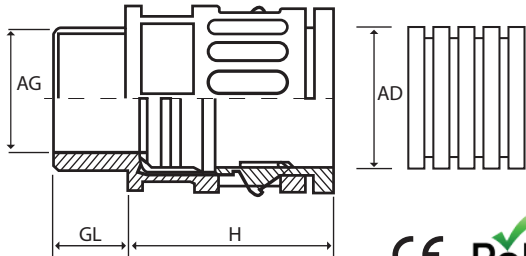

PG TYPE	Product Model	Flexible Size		Total Length (H)	Inner Size (AG)	Thread Length (GL)	Qty/Bag
	SSQC-AD10.0/PG7	AD10.0	1/4"	23.0	6.5	10.0	100
SSQC-AD13.0/PG9	AD13.0	5/16"	25.0	10.0	10.0	100	
SSQC-AD15.8/PG11	AD15.8	3/8"	27.0	12.0	10.0	100	
SSQC-AD18.5/PG13.5	AD18.5		28.0	14.3	12.0	50	
SSQC-AD21.2/PG16	AD21.2	1/2"	32.0	17.0	13.0	50	
SSQC-AD28.5/PG21	AD28.5	3/4"	34.0	23.0	14.0	50	
SSQC-AD34.5/PG29	AD34.5	1"	36.0	29.0	14.0	20	
SSQC-AD42.5/PG36	AD42.5	1-1/4"	38.5	36.0	14.0	10	
SSQC-AD54.5/PG48	AD54.5	2"	40.0	48.0	15.0	10	

M TYPE	Product Model	Flexible Size		Total Length (H)	Inner Size (AG)	Thread Length (GL)	Qty/Bag
	SSQC-AD10.0/M12(x1.5)	AD10.0	1/4"	25.0	6.5	10.0	100
SSQC-AD13.0/M16(x1.5)	AD13.0	5/16"	25.0	10.0	10.0	100	
SSQC-AD15.8/M18(x1.5)	AD15.8	3/8"	27.5	12.0	10.0	100	
SSQC-AD15.8/M20(x1.5)	AD15.8	3/8"	27.5	12.0	10.0	100	
SSQC-AD18.5/M20(x1.5)	AD18.5		28.0	14.3	12.0	50	
SSQC-AD21.2/M20(x1.5)	AD21.2	1/2"	31.5	15.0	13.0	50	
SSQC-AD25.0/M25(x1.5)	AD25.0		29.0	19.5	14.0	50	
SSQC-AD28.5/M32(x1.5)	AD28.5	3/4"	34.0	22.0	14.0	50	
SSQC-AD34.5/M32(x1.5)	AD34.5	1"	36.0	27.0	14.0	20	
SSQC-AD34.5/M36(x2.0)	AD34.5	1"	36.0	29.0	14.0	20	
SSQC-AD34.5/M40(x1.5)	AD34.5	1"	36.0	29.0	14.0	20	
SSQC-AD42.5/M40(x1.5)	AD42.5	1-1/4"	38.0	34.0	14.0	10	
SSQC-AD42.5/M48(x2.0)	AD42.5	1-1/4"	38.0	36.0	14.0	10	
SSQC-AD42.5/M50(x1.5)	AD42.5	1-1/4"	39.0	36.5	14.0	10	
SSQC-AD54.5/M50(x1.5)	AD54.5	2"	39.0	44.0	15.5	10	
SSQC-AD54.5/M63(x1.5)	AD54.5	2"	39.0	48.0	15.5	10	

G TYPE	Product Model	Flexible Size		Total Length (H)	Inner Size (AG)	Thread Length (GL)	Qty/Bag
	SSQC-AD10.0/G1/4"	AD10.0	1/4"	24.5	7.0	10.0	100
SSQC-AD13.0/G5/16"	AD13.0	5/16"	26.5	10.0	9.5	100	
SSQC-AD15.8/G3/8"	AD15.8	3/8"	28.0	12.0	10.0	100	
SSQC-AD18.5/G1/2"	AD18.5		29.0	14.5	11.0	100	
SSQC-AD21.2/G1/2"	AD21.2	1/2"	31.0	15.0	13.0	50	
SSQC-AD28.5/G3/4"	AD28.5	3/4"	35.0	20.0	14.0	50	
SSQC-AD34.5/G1"	AD34.5	1"	36.0	27.0	14.0	20	
SSQC-AD42.5/G1-1/4"	AD42.5	1-1/4"	39.0	35.0	14.0	20	
SSQC-AD54.5/G2"	AD54.5	2"	39.0	48.0	15.0	10	

PAGE 12