


Product Overview

- Material : Nickel-Plated Brass
- Claw : PA66 (Nylon), UL94-V2
- Hermetic Seal and O-Ring : NBR, Silicone Rubber
- Approvals : CE, RoHS, REACH
- Protection Degree : IP68
- Temperature Resistance : -40°C to 100°C, Short time to 120°C
- Function : EMC cable gland is designed for use with unarmoured, elastomeric and plastic cable or braided cables where EMC is required. Suitable for both indoor & outdoor applications. seals on cable outer sheath to IP68, and if fitted with patented EMC membrane, suitable to carry on cable shield.

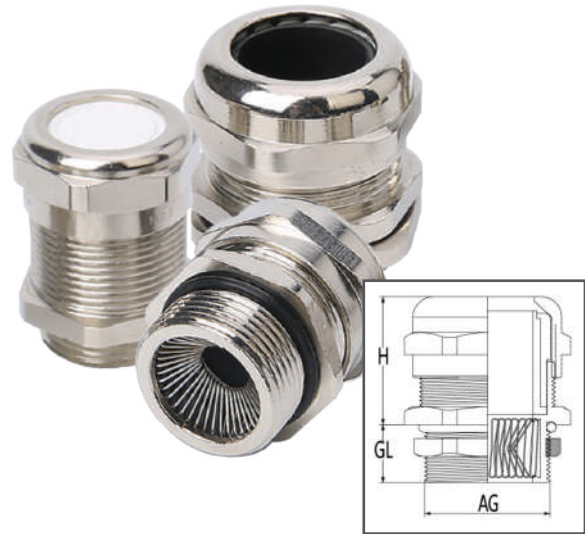

RoHS CE REACH IP68

Product Model	ITEM				Range Ø	GL Thread Length	H Joint Length	Spanner Size
	M	PG	G	NPT				
HX-EMC - *ITEM*	M12x1.5	PG7	1/4"	1/4"	3 - 6.5	6.5	21	14
					4 - 8	8.0	21	17/14
	M16x1.5	PG9			3 - 6	8.0	25	18
					4 - 8	8.0	25	18
					5 - 10	8.0	25	20/18
	M18x1.5	PG11	3/8"	3/8"	5 - 10	8.0	25	20
	M20x1.5	PG13.5	1/2"	1/2"	6 - 12	8.0	29	22
					10 - 14	8.0	29	24/22
	M22x1.5	PG16			10 - 14	8.0	29	24
					10 - 14	9.0	30	24/27
	M25x1.5	PG21	3/4"	3/4"	12 - 16	9.0	30	27
					13 - 18	9.0	30	30/27
	M32x1.5	PG29	1"	1"	15 - 22	10.0	32	35
					18 - 25	10.0	32	40/35
	M40x1.5				18 - 25	11.0	35	40/45
	PG36	1-1/4"	1-1/4"	22 - 30	11.0	35	45	
M50x1.5	PG42	1-1/2"	1-1/2"	25 - 33	11.0	35	50/45	
	PG48			32 - 38	13.0	39	57/55	
M63x1.5		2"	2"	37 - 44	14.0	40	64/68	
				42 - 52	14.0	40	78/68	

หมายเหตุ : รหัสสินค้าขึ้นอยู่กับชนิดของเกลียว เช่น ต้องการเกลียว M20x1.5 รหัสสินค้าคือ HX-EMC-M20x1.5

