


Weather Resistance UV Type

Material	PA66 (Ultraviolet)
Flammability rating	UL94V-2
Colours	Black

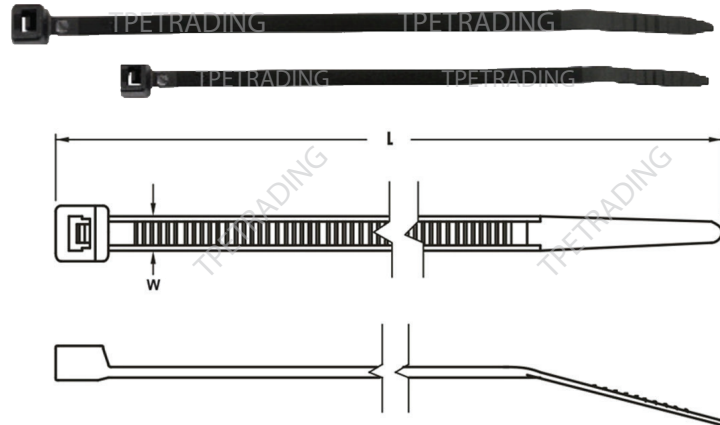

Model	Length (mm.)	Width (mm.)	Max Bundle Dia (mm.)	Min Tensile Strength (lbs.)	Packing (PCS/BAG)
K-80MU	80	2.5	15	18	100 PCS
K-90MU	96	2.5	21	18	100 PCS
K-100MU	100	2.5	22	18	100 PCS
K-120MU	120	2.5	28	18	100 PCS
K-140MU	142	2.5	35	18	100 PCS
K-165MU	165	2.5	43	18	100 PCS
K-200MU	203	2.5	53	18	100 PCS
K-140IU	143	3.6	33	40	100 PCS
K-150IU	150	3.6	35	40	100 PCS
K-180IU	180	3.6	44	40	100 PCS
K-200IU	203	3.6	52	40	100 PCS
K-250IU	250	3.6	65	40	100 PCS
K-300IU	300	3.6	76	40	100 PCS
K-370IU	368	3.6	102	40	100 PCS
K-120SU	120	4.6	24	50	100 PCS
K-160SU	160	4.6	38	50	100 PCS
K-190SU	190	4.6	46	50	100 PCS
K-200SU	203	4.6	50	50	100 PCS
K-250SU	250	4.6	65	50	100 PCS
K-280SU	280	4.6	75	50	100 PCS
K-300SU	300	4.6	80	50	100 PCS
K-370SU	368	4.6	102	50	100 PCS
K-385SU	385	4.6	105	50	100 PCS
K-430SU	432	4.6	120	50	100 PCS
K-530SDU	530	4.8	150	50	100 PCS

Crimping Tools



KST-STG200

For Tensioning and cut off ball lock type and ladder type, in all size of width up to 12.3mm.



KST-200-S284

For Stainless steel ball lock clamps up to 0.35mm. thick and 7.9mm. wide.