


**เคเบิลไทร์สแตนเลสแบบบอลล็อก**

**Stainless Steel Cable Tie  
(With Ball Lock)**

Material	316 Stainless Steel
Temperature	-80°C to 538°C
Resistance Against Chemicals	ACID and ALKALI resistance

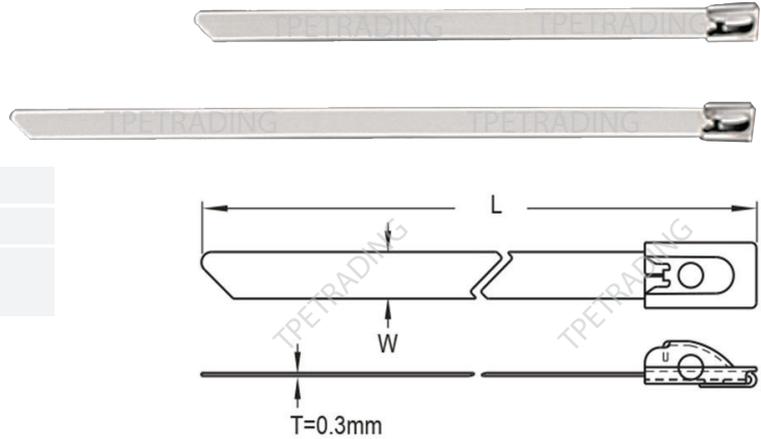

Model	Length (mm.)	Width (mm.)	Max Bundle Dia (mm.)	Min Loop Tansile	Packing (PCS/BAG)
STB-152S	152	4.5	25	45.4	100 PCS
STB-200S	200	4.5	50	45.4	100 PCS
STB-300S	300	4.5	75	45.4	100 PCS
STB-360S	360	4.5	95	45.4	100 PCS
STB-520S	520	4.5	145	45.4	100 PCS
STB-680S	680	4.5	195	45.4	100 PCS
STB-840S	840	4.5	248	45.4	100 PCS
STB-200M	200	8.0	45	113.4	100 PCS
STB-300M	300	8.0	75	113.4	100 PCS
STB-360M	360	8.0	95	113.4	100 PCS
STB-520M	520	8.0	145	113.4	100 PCS
STB-680M	680	8.0	195	113.4	100 PCS
STB-840M	840	8.0	248	113.4	100 PCS
STB-1050M	1050	8.0	315	113.4	100 PCS

**Crimping Tools**



**KST-STG200**

For Tensioning and cut off ball lock type and ladder type, in all size of width up to 12.3mm.



**KST-200-S284**

For Stainless steel ball lock clamps up to 0.35mm. thick and 7.9mm. wide.