

## CABLE DRAG CHAIN : JR-2 SERIES (FULLY ENCLOSED AND STRONG)

The rectangular metal hose is made of all metal construction. This product meet the JB/GQ058285 enterprise joint standard and is suitable for all kinds of metal chip machine tools and cutting machine tools. Prevent high heat iron fillings from damage to your power supply, water and steam line, and protect labor safety.



**Material** Stainless Steel (430)

**1. Indicate the specifications and models as shown below :**


A x B x L - assembly from : L-hose length, including connector assemble. See the hose assembly from reference to the form : I-IX

**2. Special joint from : a - c**

**Example :** 25 x 50 x 1200-I 25 x 50 x 1200-AB-III

- Note : 1. When placed horizontally, set the pallet with sufficient length below  
 2. Allow the length to exceed the length specified in the table when laying horizontally, but it is recommended to design the rolling bearing points in the appropriate position to prevent the hose from bending down.

### Hose Connector size chart

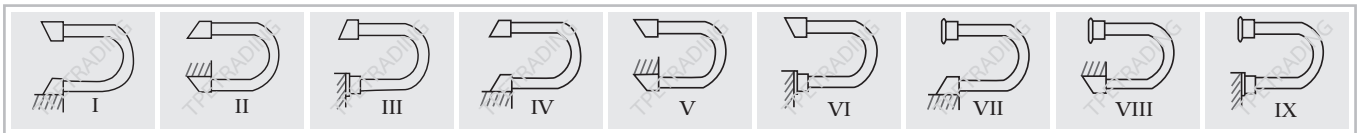

### Connector size and specification parameter sheet

Model	Inner Diameter A x B	Outer Diameter C x D	E	F	G	H	I	L	J	K	N	P	S	X	T	∅	R	Weight (KG/m)
TPE-JR1	22 x 32	27.5 x 36.7	38	18	25	22	10	23	60	20	40	78	60	60	38	5.5	70	1.30
TPE-JR2	25 x 50	31.5 x 54.5	58	30	35	25	10	33	70	25	50	90	75	60	45	5.5	90	1.75
TPE-JR3	35 x 60	40.1 x 64.4	69	40	45	25	10	44	70	30	50	100	80	70	52	5.5	100	2.10
TPE-JR4	38 x 73	43.7 x 77.8	82	50	55	35	10	47	90	35	55	110	85	82	62	6.5	110	2.36
TPE-JR5	40 x 80	45.4 x 84.7	89	50	65	50	15	49	120	40	60	120	100	90	68	9.0	120	2.50
TPE-JR6	52 x 102	57.5 x 107.8	113	65	80	50	15	63	130	45	60	140	120	100	80	9.0	140	2.85
TPE-JR7	60 x 120	67.5 x 127.7	132	90	90	80	20	71	150	45	70	170	146	110	84	9.0	180	3.15
TPE-JR8	60 x 130	65.1 x 134.4	141	95	100	90	20	71	160	50	75	180	150	120	90	9.0	180	3.25
TPE-JR9	72 x 162	78.4 x 168.2	184	120	120	100	20	82	180	60	80	210	180	130	100	9.0	210	4.50

### Specification Sheet

Specification	TPE-JR1 22 x 32	TPE-JR2 25 x 50	TPE-JR3 35 x 60	TPE-JR4 38 x 73	TPE-JR5 40 x 80	TPE-JR6 52 x 102	TPE-JR7 60 x 120	TPE-JR8 60 x 130	TPE-JR9 72 x 162
Load Weight (KG)	3	6.5	10.5	11.5	12.5	16.5	20	22	24
Allowable Length (m)	2	3	3	4	5	6	7	8	8

